



Revolucija pametnih rešitev



Agenda

1. Predstavitev podjetij
2. Uporaba pametnih naprav
3. Povezljivost in komunikacija
4. Sistemski sklopi
5. Produktna predstavitev
6. Aplikacija in programiranje

Kdo smo?

Smo vodilni ponudnik inovativnih in inteligentnih rešitev za avtomatizacijo bivalnih in industrijskih objektov.

Naše podjetje je predano raziskovanju sodobnih pametnih rešitev in stremi k naprednemu preoblikovanju tradicionalnih inštalacij.

Specializirani smo za načrtovanje in implementacijo najsodobnejših tehnologij, ki izboljšujejo udobje, nadzor in varnost, hkrati pa ponujamo energetske učinkovite, trajnostne in celovite rešitve.



IoT rešitve Sonoff

Sonoff je vodilna blagovna znamka na področju avtomatizacije pametnega doma, z močnim poudarkom na inovacijah, zanesljivosti in uporabniku prijaznem dizajnu.

Sonoff ponuja široko paleto pametnih naprav in rešitev, ki običajne domove spremenijo v inteligentne in povezane bivalne prostore.


Sonoff izdelki uporabnikom omogočajo nadzor in spremljanje svojih domov na daljavo, s čimer povečajo udobje, nadzor in varnost.



- Oddaljen nadzor
- Avtomatizacija in integracija senzorjev
 - Varnost in zasebnost
- Optimizacija porabe električne energije
 - Scene in skupinski nadzor
 - Glasovno upravljanje
- Integracija s preostalimi platformami

Uporaba

Naprave Sonoff ponujajo vrsto funkcij, ki izboljšajo udobje, nadzor in varnost vašega pametnega doma. Tukaj je nekaj ključnih zmogljivosti naprav Sonoff:

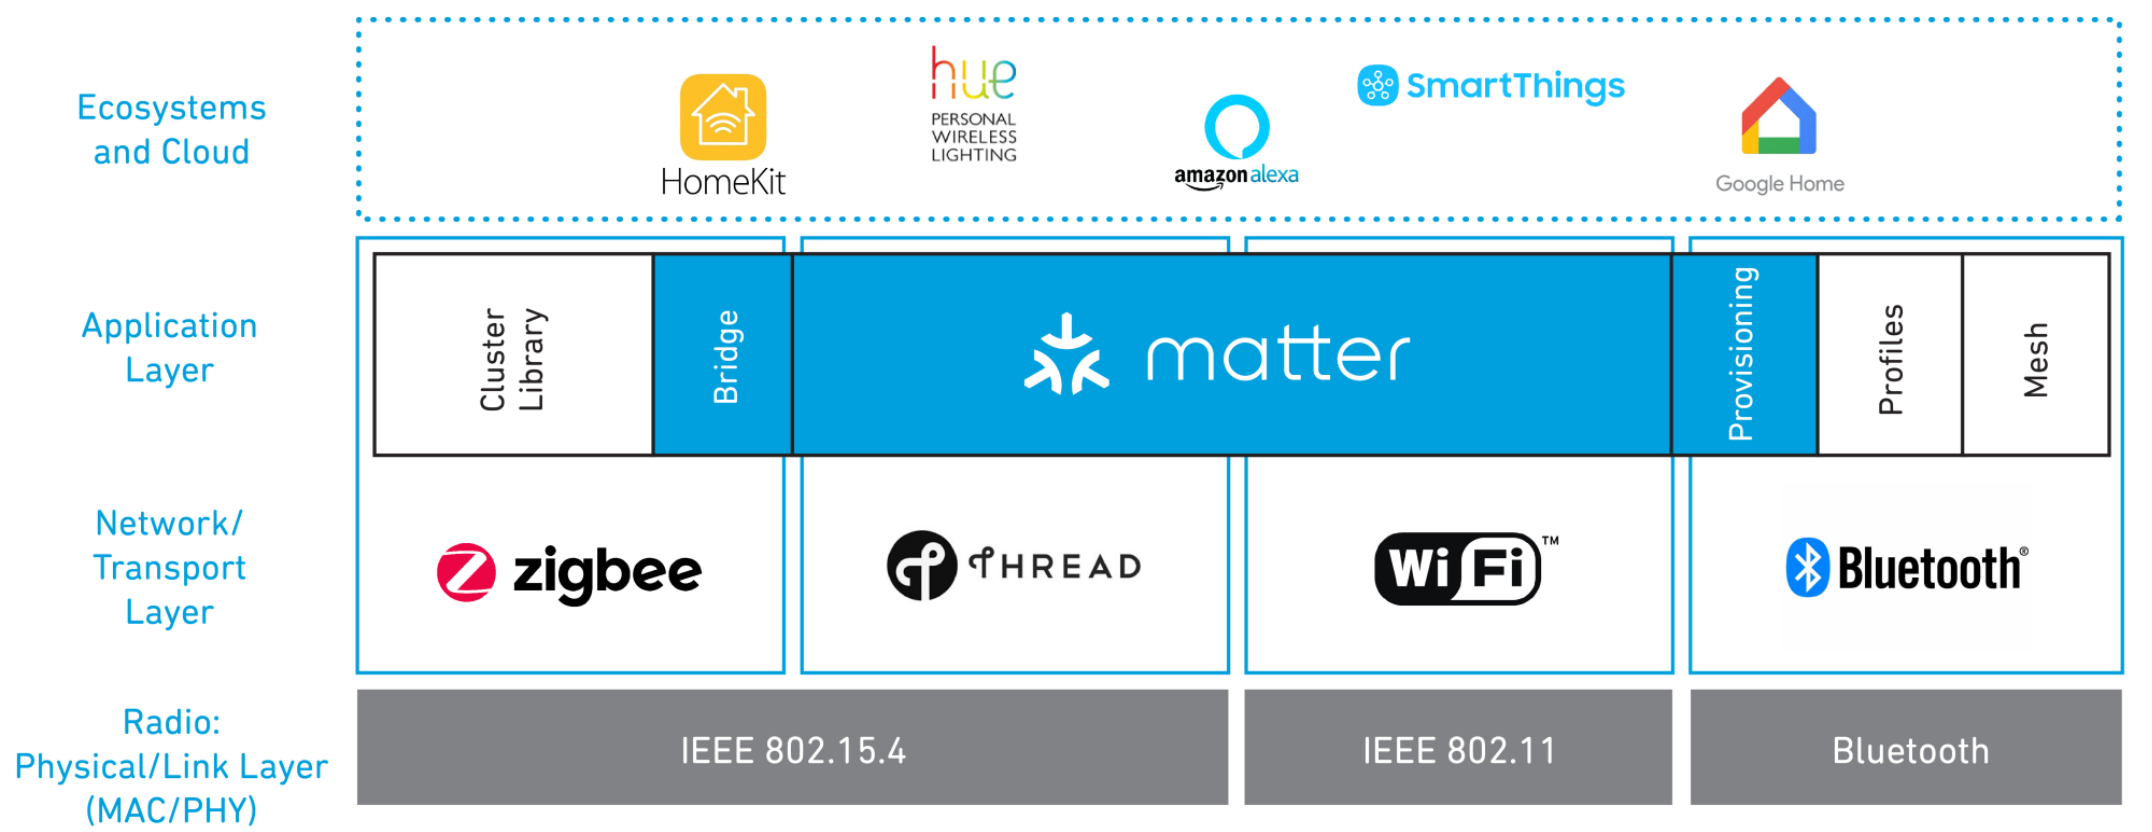

Povezljivost in komunikacija


Izdelki Sonoff uporabljajo različne komunikacijske protokole, ki omogočajo brezhibno povezljivost in nadzor. Primarne komunikacijske metode, ki jih uporabljajo naprave Sonoff, vključujejo:

- Wi-Fi (2.4GHz)
- RF (Radio Frequency) – zahteva bridge
 - ZigBee – zahteva bridge
 - Thread – zahteva bridge
 - Bluetooth
 - LAN control



SONOFF smart devices support to work with the following AIoT ecosystems

works with alexa

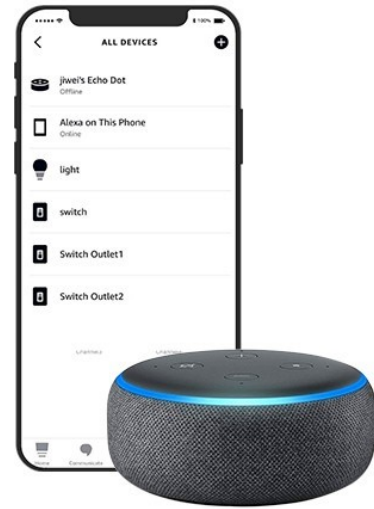

works with Google Assistant



works with Alice



works with HUAWEI HiLink




works with 米家




works with 小度



works with SmartThings

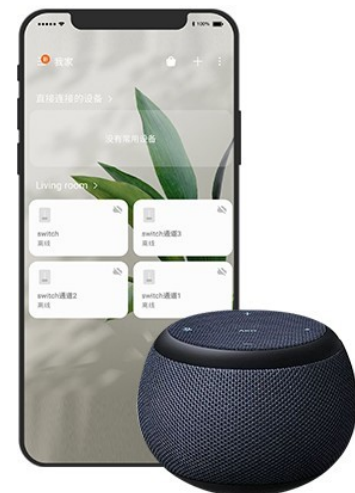

Hey Siri

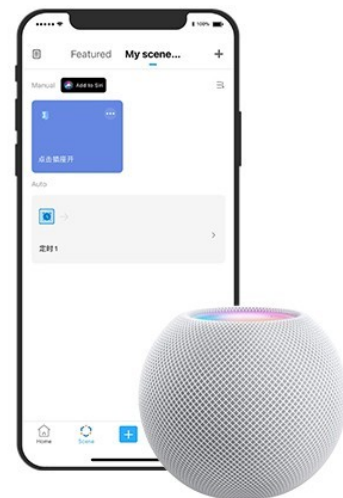

works with IFTTT



works with 天猫精灵



works with 萤石



works with 美的美居



1. Pametna razsvetljava
2. Pametne vtičnice
3. Pametna senčila
4. Pametna garažna in dovozna vrata
5. Pametni merilci porabe električne energije
6. Pametni merilci temperature in vlage
7. Pametni protivlomni senzorji
8. Pametni nadzor gibanja in kamere
9. Pametni detektorji dima
10. Pametni detektorji razlitja vode

Sistemske sklopi

Naprave Sonoff ponujajo vrsto sistemskih integracij, ki uporabniku zagotovijo različne nivoje udobja in varnosti. Tukaj je nekaj ključnih sistemov naprav Sonoff:

Pametna razsvetljava

SMART WALL SWITCHES



TX

Wi-Fi Smart Wall Switch EU Type



Remote Control




RF Control



Touch Control

Input	100-240V AC 50/60Hz
Output	100-240V AC 50/60Hz
Max. Load	1C: 2A/480W 2C: 2A/480W/Gang, 4A/960W/Total 3C: 1A/240W/Gang, 3A/720W/Total
Wi-Fi	IEEE 802.11 b/g/n 2.4GHz
Material	PC V0 & Tempered glass panel
Box Size	95x95x42mm
Weight	178g (1C), 185g (2C), 185g (3C)



TX

Wi-Fi Smart Wall Switch UK Type



Remote Control




RF Control



Touch Control

Input	100-240V AC 50/60Hz
Output	100-240V AC 50/60Hz
Max. Load	1C: 2A/480W 2C: 2A/480W/Gang, 4A/960W/Total 3C: 2A/480W/Gang, 6A/1440W/Total
Wi-Fi	IEEE 802.11 b/g/n 2.4GHz
Material	PC V0 & Tempered glass panel
Box Size	95x95x42mm
Weight	185g (1C), 193g (2C), 200g (3C)

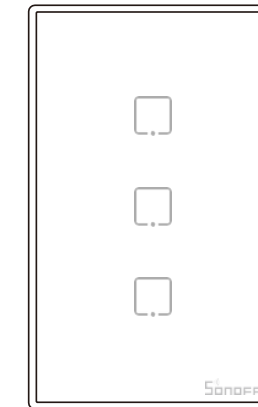

TX

Wi-Fi Smart Wall Switch US Type



Remote Control



RF Control



Touch Control

Input	100-240V AC 50/60Hz
Output	100-240V AC 50/60Hz
Max. Load	1C: 2A/480W 2C: 2A/480W/Gang, 4A/960W/Total 3C: 2A/480W/Gang, 6A/1440W/Total
Wi-Fi	IEEE 802.11 b/g/n 2.4GHz
Material	PC V0 & Tempered glass panel
Box Size	126x79x44mm
Weight	207g (1C), 217g (2C), 225g (3C)

SMART WALL SWITCHES



	T0	T1	T2	T3
433MHz	—	✓	✓	✓
1-gang	✓	✓	✓	✓
2-gang	✓	✓	✓	✓
3-gang	✓	✓	✓	✓
EU	 white	 white	 white	 black
UK	 white	 white	 white	 black
US	 white	—	 white	 black

SMART WALL SWITCHES

T2EU1C/2C/3C-RF

Stick-on Switch (Remote Controller)



RF Control



Touch Control

Battery	3V x 2 (CR2032)
Wireless	433MHz
Material	PC V0 & Tempered glass panel
Box Size	88x89x18mm
Weight	96g (1C), 95g (2C), 98g (3C)



T2EU1C-RF




T2EU2C-RF



T2EU3C-RF

SMART WALL SWITCHES

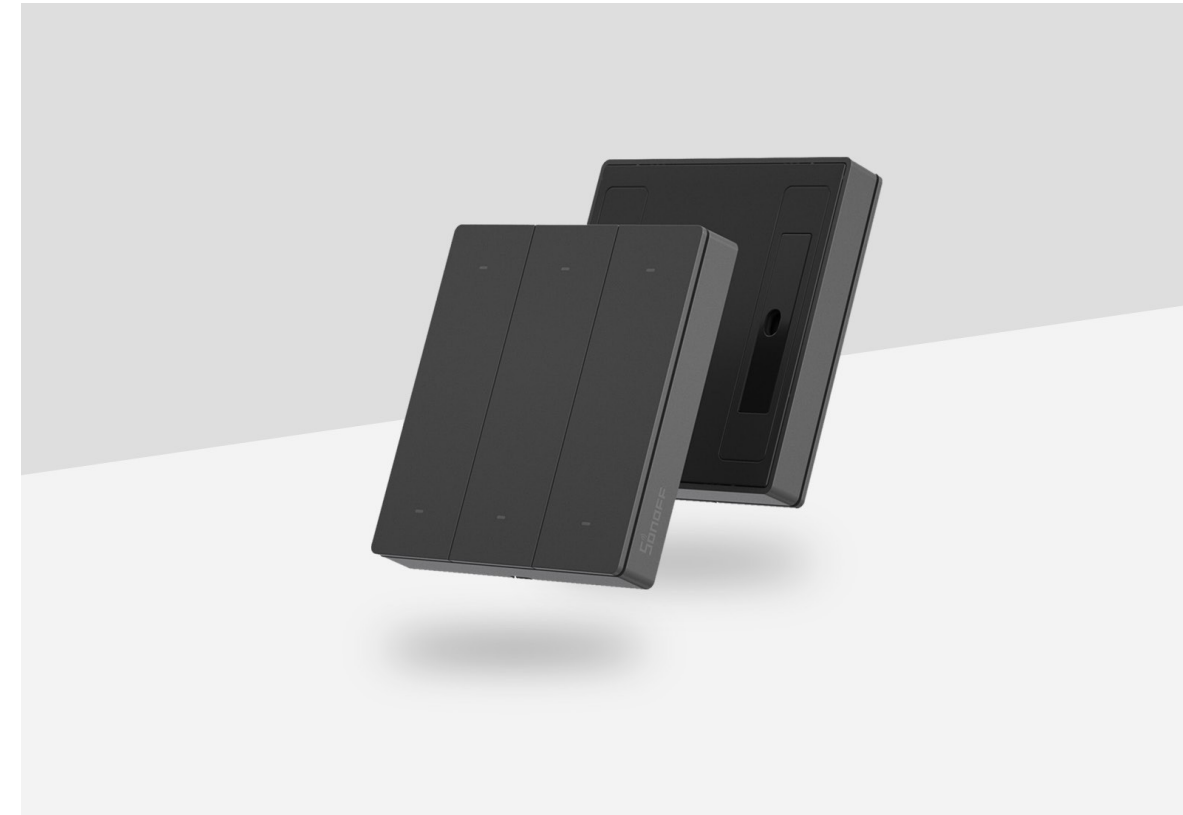


SwitchMan R5

Scene Controller



eWeLink-Remote

Power supply	6V (3V button cell x 2)
Battery model	CR2032
Control distance:	Max. 90m (Open space)
Numbers of button	6
Box Size	97x89x17mm
Weight	111g

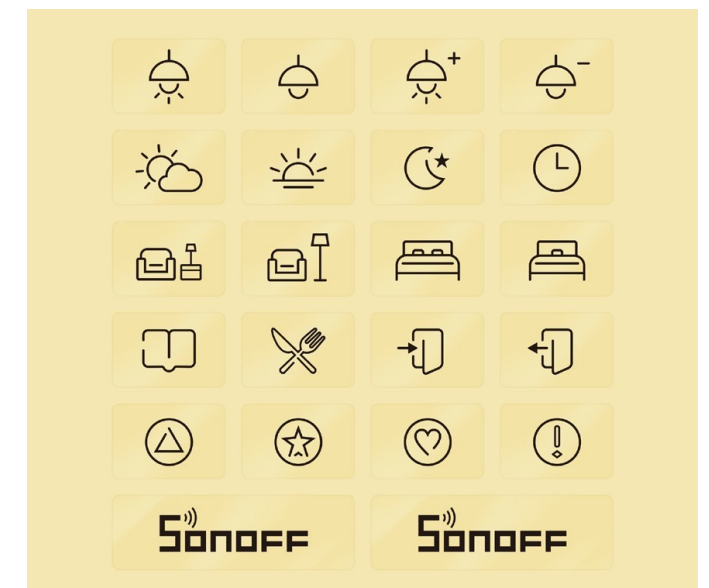

Button sticker

SMART WALL SWITCHES

SwitchMan M5

Smart Wall Switch



Remote Control



Voice Control



Input	100-240V AC 50/60Hz
Output	100-240V AC 50/60Hz
LED load LED	M5-1C: 300W/220V, 150W/110V M5-2C: 300W/220V/Gang, 150W/110V/Gang M5-3C: 100W/220V/Gang, 60W/110V/Gang
Max. Load	M5-1C: 10A/2200W M5-2C: 10A(5A/Gang), 2200W(1100W/Gang) M5-3C: 6A(2A/Gang), 1320W(440W/Gang)
Gang	1-Gang/2-Gang/3-Gang
Wi-Fi	IEEE 802.11 b/g/n 2.4GHz
Material	PC V0
Box Size	80: 89x74x45mm 86: 89x89x45mm 120: 126x79x47mm
Weight	80: 1C(154g) 、 2C(161g) 、 3C(164g) 86: 1C(177g) 、 2C(184g) 、 3C(186g) 120: 1C(208g) 、 2C(216g) 、 3C(218g)



M5-1C-80

M5-2C-80

M5-3C-80



M5-1C-86

M5-2C-86

M5-3C-86



M5-1C-120

M5-2C-120


M5-3C-120

SMART WALL SWITCHES



Switch Frame

2-Gang/3-Gang/4-Gang Switch Frame

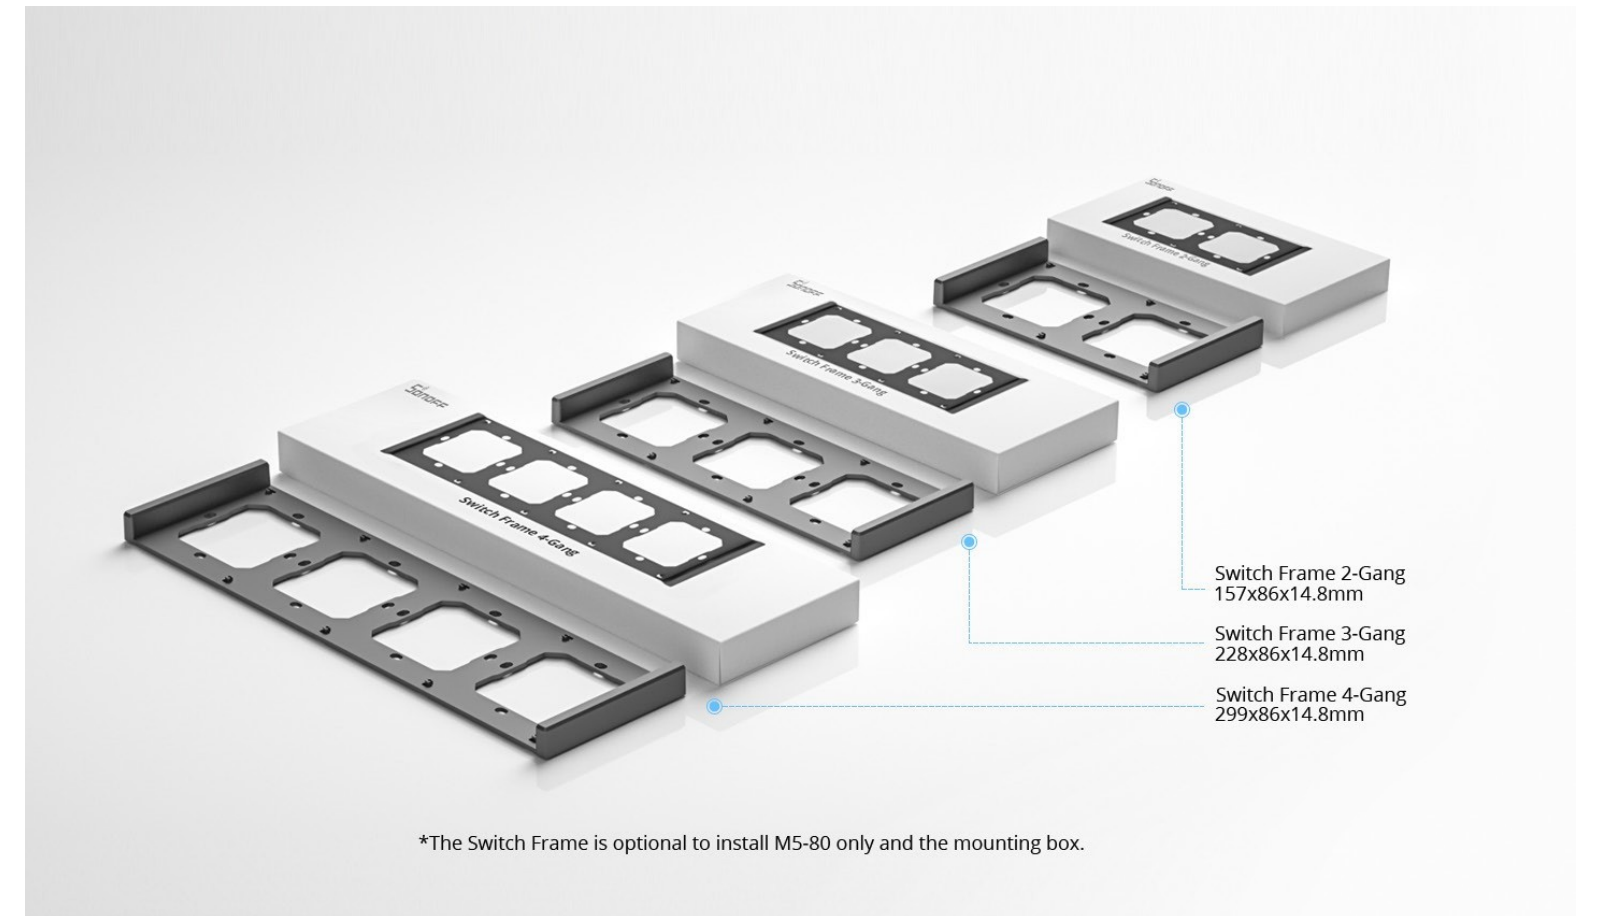




SMART LIGHTING





D1

Wi-Fi Smart Dimmer Switch

- 
 Remote Control
- 
 RF Control
- 
 Stepless Dimming

Input	100-240V AC 50/60Hz
Output	100-240V AC 50/60Hz
Max. Load	200W/Incandescent Bulb 150W/Dimmable LED
Wi-Fi	IEEE 802.11 b/g/n 2.4GHz
Material	PC V0
Box Size	65x52x36mm
Weight	45g

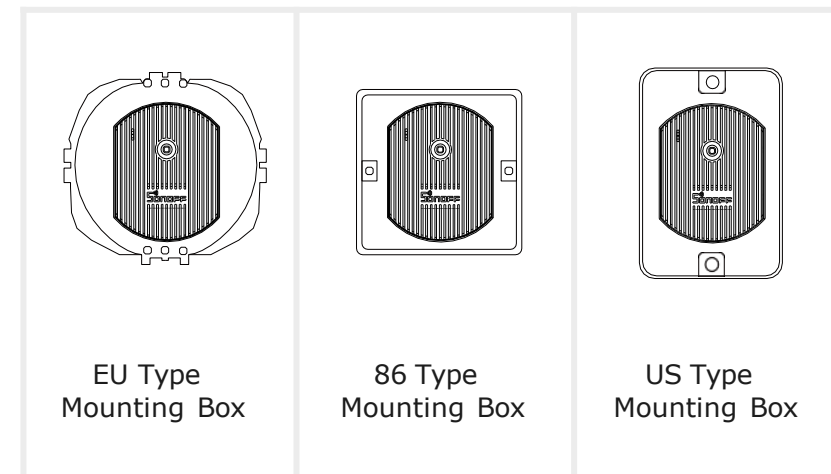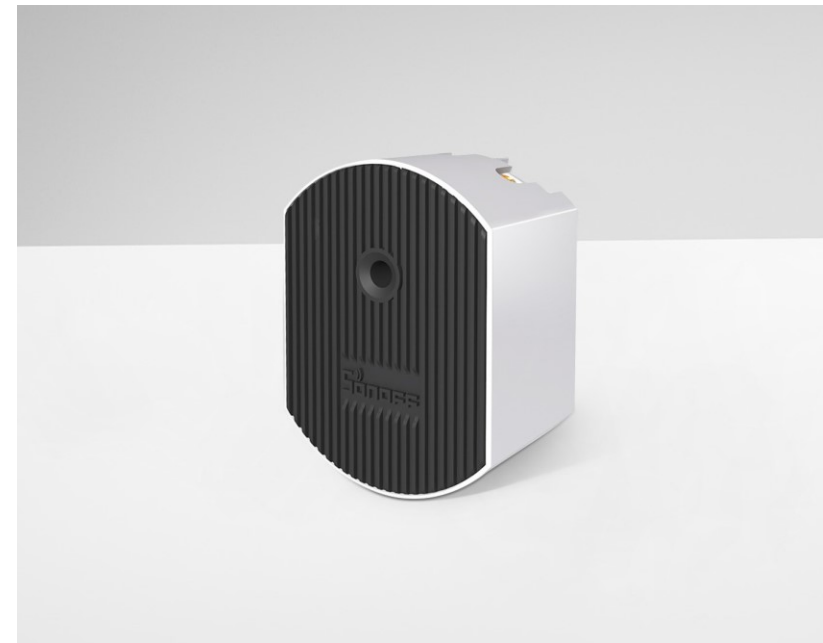

Matching accessories
(Refer to the accessory series for details)

RM433R2
8-key 433MHz Remote Controller



RM433R2-BASE
433MHz Remote Controller Base






Pametni moduli

DIY SMART SWITCHES

BASICR2

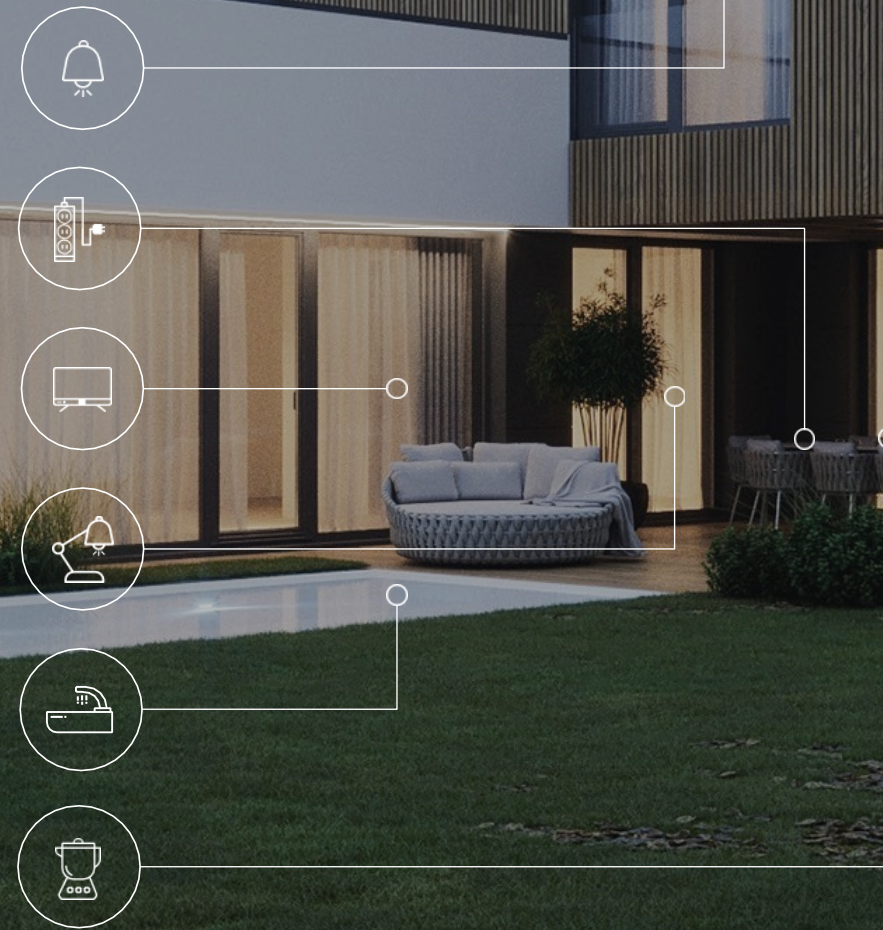

5
HARDWARE UPDATE


26
SOFTWARE UPDATE

7 Million
CUMULATIVE SALES EXCEEDED

BASICR2

Wi-Fi Smart Switch


Remote Control


Voice Control

Input	100-240V AC 50/60Hz
Output	100-240V AC 50/60Hz
Max. Load	10A/2200W
Gang	1-Gang
Wi-Fi	IEEE 802.11 b/g/n 2.4GHz
Material	PC V0
Box Size	90x41x27mm
Weight	58g



DIY SMART SWITCHES



RFR2

Wi-Fi Smart Switch with RF Control



Remote Control



RF Control



Voice Control

Input	100-240V AC 50/60Hz
Output	100-240V AC 50/60Hz
Max. Load	10A/2200W
Gang	1-Gang
Wi-Fi	IEEE 802.11 b/g/n 2.4GHz
Material	PC V0
Box Size	90x41x27mm
Weight	59g



DIY SMART SWITCHES



MINIR2

Wi-Fi Smart Switch with DIY Mode



Remote Control



Voice Control



DIY Mode

Input	100-240V AC 50/60Hz
Output	100-240V AC 50/60Hz
Max. Load	10A/2200W
Gang	1-Gang
Wi-Fi	IEEE 802.11 b/g/n 2.4GHz
Material	PC V0
Box Size	48x30x46mm
Weight	43g

ZBMINI

ZigBee Smart Switch



Remote Control



Voice Control

Input	100-240V AC 50/60Hz
Output	100-240V AC 50/60Hz
Max. Load	10A/2200W
Gang	1-Gang
ZigBee	IEEE 802.15.4 2.4GHz
Material	PC V0
Box Size	48x30x46mm
Weight	42g

DIY SMART SWITCHES



MINIR3

Smart Switch



Remote Control



Voice Control



DIY Mode

Input	100-240V AC 50/60Hz
Output	100-240V AC 50/60Hz
Max. Load	16A/3500W
Gang	1-Gang
Wi-Fi	IEEE 802.11 b/g/n 2.4GHz
Material	PC V0
Box Size	64x46x32mm
Weight	43g



S-MATE

Switch Mate



eWeLink-Remote

Input	100-240V AC 50/60Hz
Output	100-240V AC 50/60Hz
Max. Load	16A/3500W
Gang	3-Gang
Battery	3V (CR2032)
Material	PC V0
Box Size	53x46x29mm
Weight	46g

*The switch connected to S-MATE can be used as a "eWeLink-Remote" controller.

DIY SMART SWITCHES



ZBMINI-L

ZigBee Smart Switch



Remote Control




Voice Control



No Neutral Wire Required

Input	100-240V AC 50/60Hz
Output	100-240V AC 50/60Hz
Max. Load	1380W Max @230V, 720W Max @120V
Gang	1-Gang
ZigBee	IEEE 802.15.4 2.4GHz
Material	PC V0
Box Size	64x46x32mm
Weight	60g

DIY SMART SWITCHES

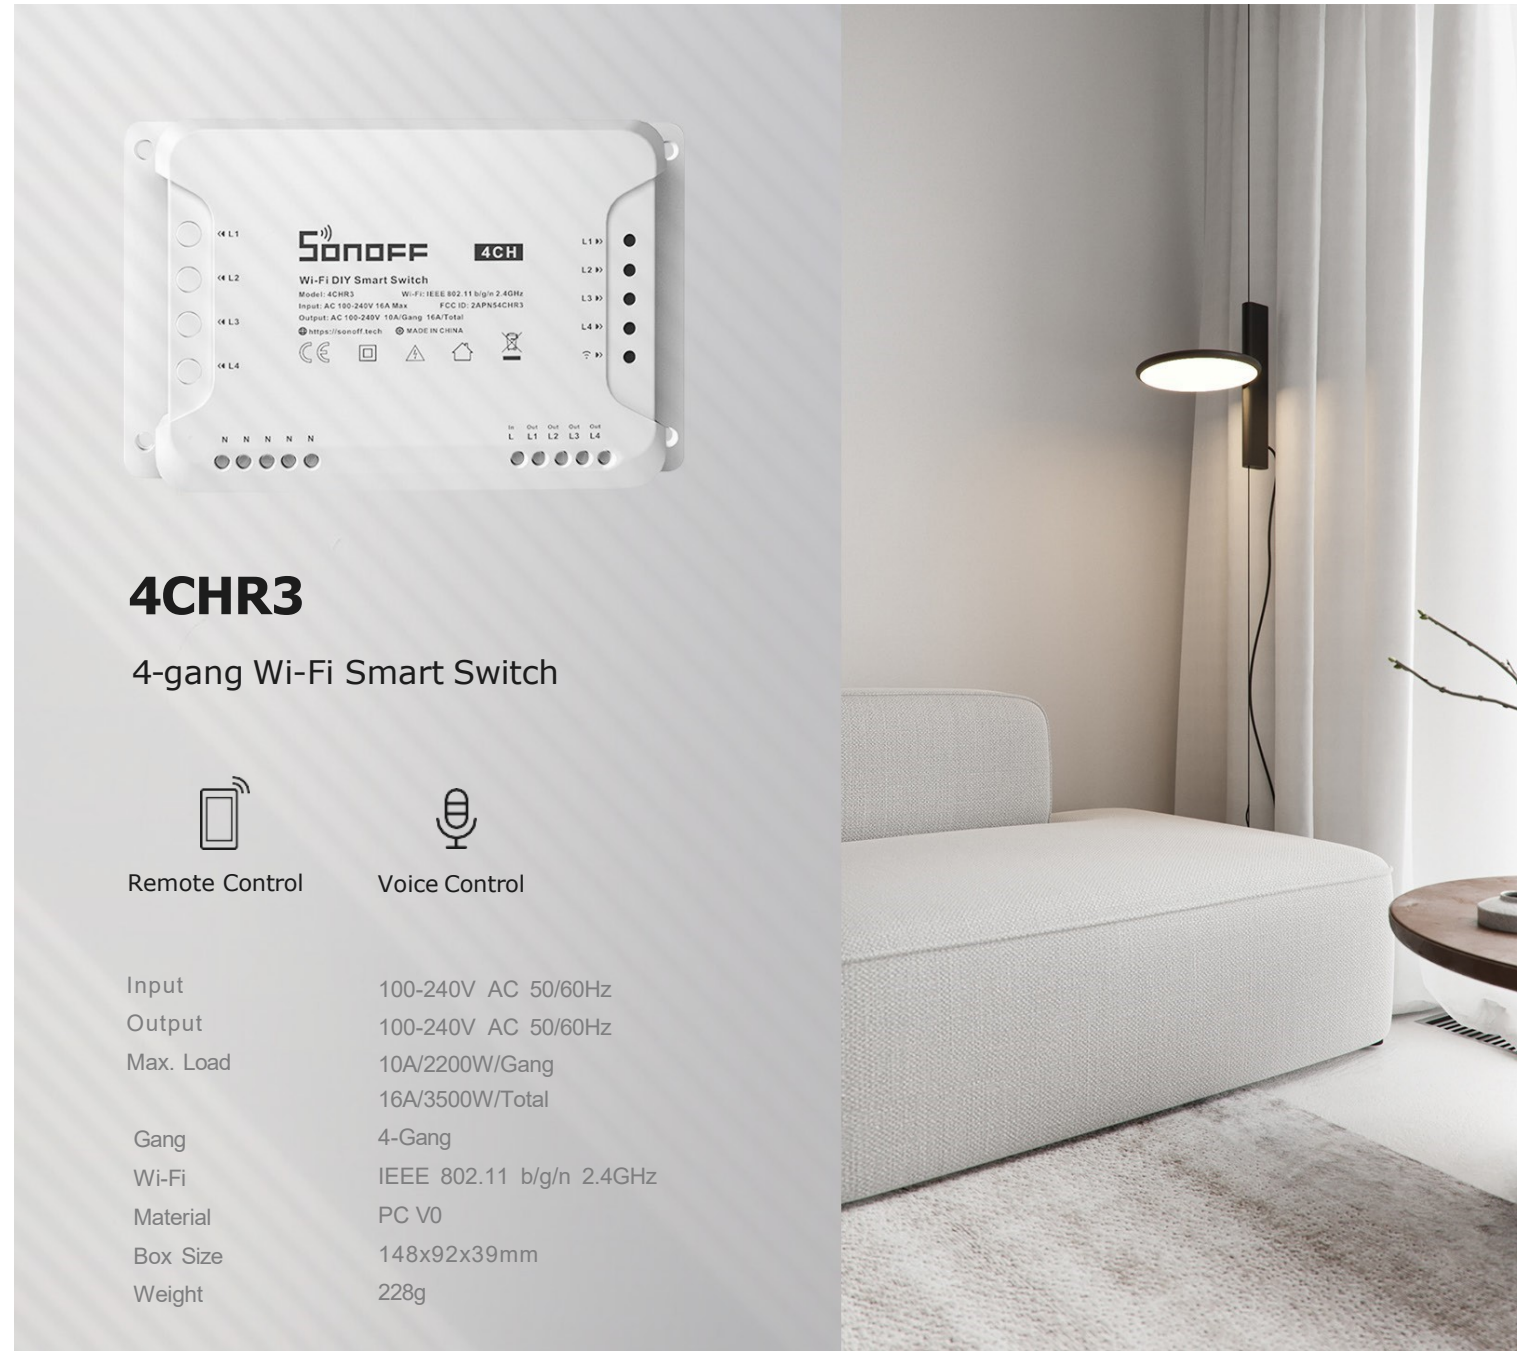

4CHR3

4-gang Wi-Fi Smart Switch



Remote Control



Voice Control

Input	100-240V AC 50/60Hz
Output	100-240V AC 50/60Hz
Max. Load	10A/2200W/Gang 16A/3500W/Total
Gang	4-Gang
Wi-Fi	IEEE 802.11 b/g/n 2.4GHz
Material	PC V0
Box Size	148x92x39mm
Weight	228g



4CHPROR3

4-gang Wi-Fi Smart Switch with RF Control



Remote Control



RF Control



Voice Control



Interlock Mode

Input	DC: 9-23V, AC: 100-240V 50/60Hz
Output	Dry contact
Max. Load	240V AC/10A /Gang; 30V DC/5A/Gang
Gang	4-Gang
Wi-Fi	IEEE 802.11 b/g/n 2.4GHz
Material	PC V0
Box Size	148x92x39mm
Weight	241g

Matching accessories
(Refer to the accessory series for details)

RM433R2

8-key 433MHz Remote Controller



RM433R2-BASE

433MHz Remote Controller Base



433 RF Controller

4-key 433MHz Remote Controller



DIY SMART SWITCHES



iFan04-L / H

Wi-Fi Smart Ceiling Fan with Light Controller



Remote Control



RF Control



Voice Control



Fan Speed Adjustment

Input

100-240V AC 50/60Hz 5A

Output

Light: 100-240V AC 50/60Hz 3A

iFan04-L: (Tungsten lamp: 360W/120V, Max Led: 150W/120V Max)

iFan04-H: (Tungsten lamp: 690W/230V, Max Led: 300W/230V Max)

Fan: 100-240V AC 50/60Hz 2A Max

Gang

2-Gang

Wi-Fi

IEEE 802.11 b/g/n 2.4GHz

Material

PC V0

Box Size

130x62x52mm

Weight

205g

Matching accessories
(Refer to the accessory
series for details)

RM433R2

8-key 433MHz Remote Controller



RM433R2-BASE

433MHz Remote Controller Base



DIY SMART SWITCHES



Micro/Micro-CFH



USB Smart Adapter




Remote Control



Voice Control

Input	5V $\overline{\text{---}}$
Output	5V $\overline{\text{---}}$ 2.5A
Gang	1-Gang
Wi-Fi	IEEE 802.11 b/g/n 2.4GHz
Material	PC V0
Box Size	38x33x52mm
Weight	23g



Pametne centralne nadzorne enote

SMART WALL SWITCHES



NSPanel-EU/US

Smart Scene Wall Switch



Remote Control



Voice Control



Thermostat



Touch Control

Input	100-240V AC 50/60Hz 4A Max
Output	100-240V AC 50/60Hz 2A/Gang 4A/Total Max
LED load	LED 150W/110V/Gang, 300W/110V/Total 300W/220V/Gang, 600W/220V/Total
Gang	2-Gang
Wi-Fi	IEEE 802.11 b/g/n 2.4GHz
Material	PC V0 + CRS + Tempered glass panel
Box Size	89x89x49mm (UE), 126x79x47mm (US)
Weight 重量:	186g



SMART HOME SECURITY



NSPanel Pro

Smart Home Control Panel



Remote Control



Voice Control



Thermostat



Touch Control

Input :	100-240V AC 50/60Hz
Output :	100-240V AC 50/60Hz
Max. Load:	5W MAX: 150mA
Color :	NSPanel86PB: Dim Gray (灰色) NSPanel86PW: White (白色)
Wi-Fi :	IEEE 802.11 b/g/n 2.4GHz
Material :	PC V0 +CRS +Tempered glass panel
Box Size :	91.5x91.5x50mm
Weight :	180g



NSPanel86PB



NSPanel86PW

Pametne vtičnice

SMART PLUGS



S26R2

Wi-Fi Smart Plugs




Remote Control




Voice Control


Input	100-250V AC 50/60Hz
Output	100-250V AC 50/60Hz
Max. Load	4000W/16A (TPF, TPN, TPH, TPAI, TPJ) 3750W/15A (TPI), 3680W/16A (TPE) 3250W/13A (TPG), 1800W/15A (TPB) 1500W/6A (TPL)
Wi-Fi	IEEE 802.11 b/g/n 2.4GHz
Material	PC V0
Box Size	101x59x75mm
Weight	105g-130g

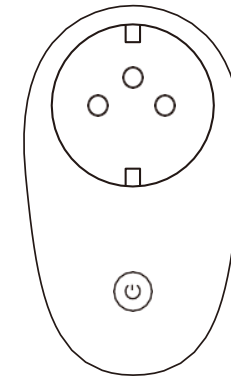


S26R2TPE
FR

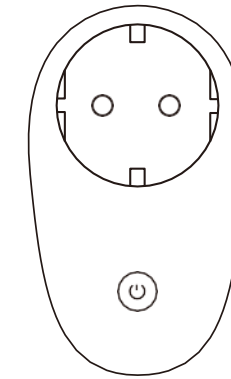


S26R2TPF
DE

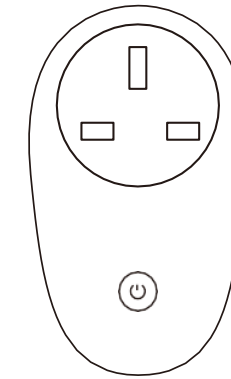


S26R2TPG
UK

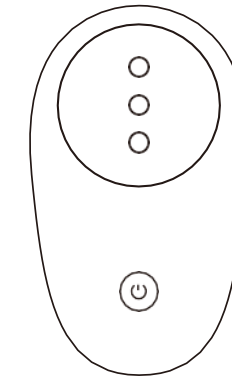


S26R2TPL
IT

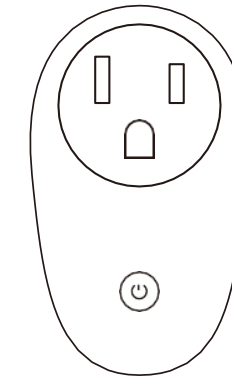


S26R2TPB
US

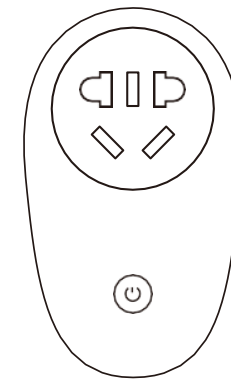


S26R2TPAI
CN

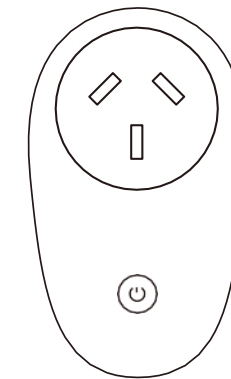


S26R2TPI
AU

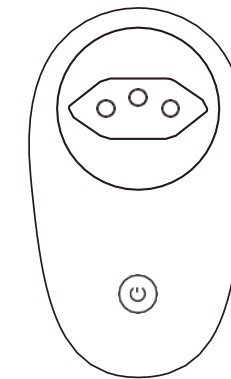

S26R2TPN
BR

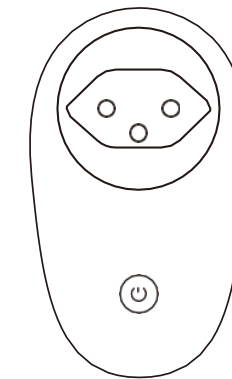

S26R2TPJ
CH

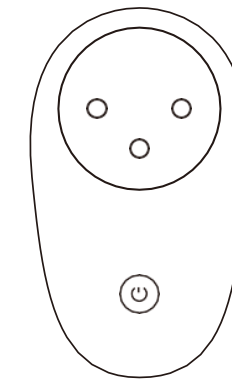

S26R2TPH
IL

SMART PLUGS



S26R2ZBTPG
UK

S26R2ZB

ZigBee Smart Plugs



Remote Control



Voice Control

Input	100-250V AC 50/60Hz
Output	100-250V AC 50/60Hz
Max. Load	4000W/16A (ZBTPF) 3680W (230V)/16A (ZBTPE) 3250W/13A (ZBTPG)

ZigBee	IEEE 802.15.4 2.4GHz
Material	PC V0
Box Size	101x59x75mm
Weight	120g-130g



S26R2ZBTPF
DE




S26R2ZBTPE
FR


SMART PLUGS




S55 Wi-Fi Waterproof Smart Socket




Input	100-240V AC 50/60Hz
Output	100-240V AC 50/60Hz
Max. Load	US: 125V AC 50/60Hz 15A Max ZA:100-240V AC 50/60Hz 10A Max FR:100-240V AC 50/60Hz 16A Max DE:100-240V AC 50/60Hz 16A Max UK:100-240V AC 50/60Hz 13A Max AU:100-240V AC 50/60Hz 10A Max
Wi-Fi	IEEE 802.11 b/g/n 2.4GHz
Material	PC V0
Box Size	92x73x84mm
Weight	239 (DE/FR) 240g (UK) 234g (US) 236g (AU), 237g (ZA)

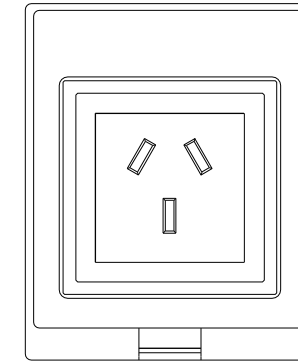


S55TPI
AU

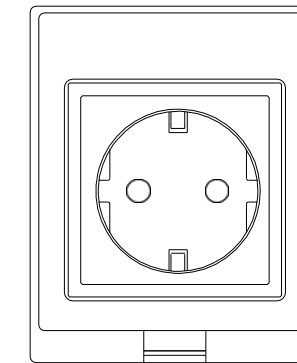


S55TPF
DE

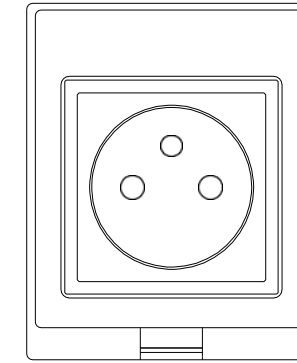


S55TPE
FR

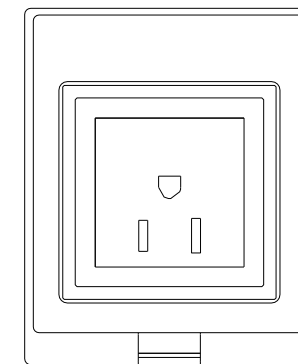

S55TPB
US

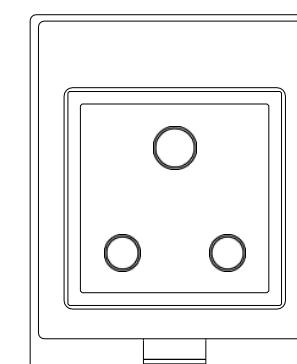

S55TPD
ZA

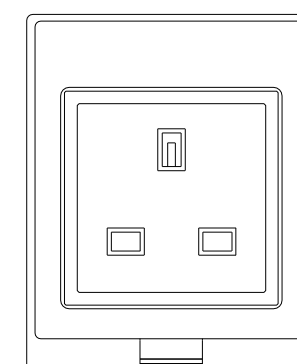

S55TPG
UK




Pametna senčila

DIY SMART SWITCHES



POWR3

Wi-Fi Smart Switch with Energy Monitoring



Input	100-240V AC 50/60Hz
Output	100-240V AC 50/60Hz
Max. Load	25A/5500W
Gang	1-Gang
Wi-Fi	IEEE 802.11 b/g/n 2.4GHz
Material	PC V0
Box Size	166x125x49mm
Weight	530g



DUALR3

2-gang Wi-Fi Smart Switch




Input	100-240V AC 50/60Hz
Output	100-240V AC 50/60Hz
Max. Load	10A/2200W/gang, 15A/3300W/Total
Motor Load	1A/10-240W
Gang	2-Gang
Wi-Fi	IEEE 802.11 b/g/n 2.4GHz
Material	PC V0
Box Size	64x50x32mm
Weight	75g



DUALR3 Lite

2-gang Wi-Fi Smart Switch



Input	100-240V AC 50/60Hz
Output	100-240V AC 50/60Hz
Max. Load	10A/2200W/gang, 15A/3300W/Total
Motor Load	1A/10-240W
Gang	2-Gang
Wi-Fi	IEEE 802.11 b/g/n 2.4GHz
Material	PC V0
Box Size	64x50x32mm
Weight	70g



Pametna garažna vrata

DIY SMART SWITCHES



SMW-REL-GAR

Wi-Fi Smart Switch for garage door



Remote Control

Input	5V microUSB
Gang	1-Gang
Wi-Fi	IEEE 802.11 b/g/n 2.4GHz
Material	PC V0
Box Size	166x125x49mm
Weight	530g



The background features a dark blue gradient with several overlapping geometric shapes. On the left, a large light blue diamond points to the right. To its right, a medium purple diamond points to the left. Further right, a smaller light blue diamond points to the right. On the far right, a large medium purple diamond points to the left. The text is centered between the two medium purple diamonds.


Pametni merilci porabe električne energije

DIY SMART SWITCHES



POWR3

Wi-Fi Smart Switch with Energy Monitoring



Input	100-240V AC 50/60Hz
Output	100-240V AC 50/60Hz
Max. Load	25A/5500W
Gang	1-Gang
Wi-Fi	IEEE 802.11 b/g/n 2.4GHz
Material	PC V0
Box Size	166x125x49mm
Weight	530g




DUALR3

2-gang Wi-Fi Smart Switch



Input	100-240V AC 50/60Hz
Output	100-240V AC 50/60Hz
Max. Load	10A/2200W/gang, 15A/3300W/Total
Motor Load	1A/10-240W
Gang	2-Gang
Wi-Fi	IEEE 802.11 b/g/n 2.4GHz
Material	PC V0
Box Size	64x50x32mm
Weight	75g

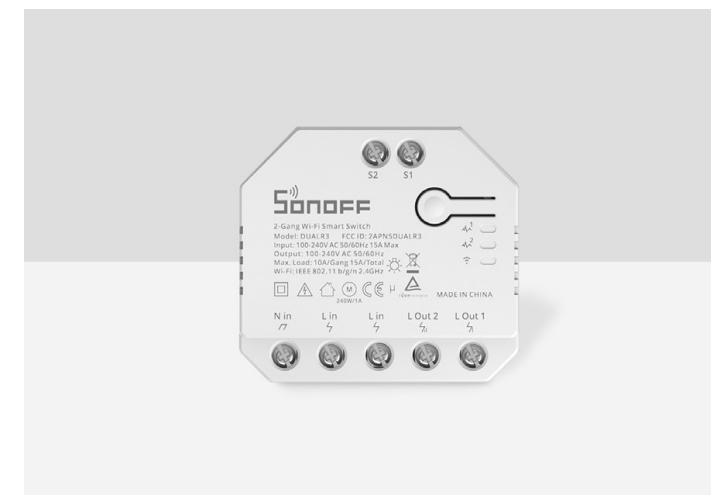

DIY SMART SWITCHES



POW Origin/Elite

Smart Power Meter Switch

Wi-Fi



Remote Control



Voice Control



Power Monitoring



Single/Countdown Timing

Input :	POWR316, POWR316D: 100-240V ~50/60Hz 16A Max POWR320D: 100-240V ~50/60Hz 20A Max
Output:	POWR316, POWR316D: 100-240V ~50/60Hz 16A Max POWR320D: 100-240V ~50/60Hz 20A Max
Wi-Fi:	IEEE 802.11 b/g/n 2.4GHz
Material :	PC V0
Box Size :	POWR316: 105x64x35mm POWR316D, POWR320D: 105x64x39mm
Weight:	POWR316: 130g POWR316D, POWR320D: 150g



POWR316



POWR316D/POWR320D

DIY SMART SWITCHES

SPM-Main



SPM-4Relay



SPM-Main

Smart Stackable Power Meter



Remote Control

Voltage	100-240V AC 50/60Hz
Output	100-240V AC 50/60Hz
Max. Current	50mA
Micro SD card	Support (8GB-32GB)
Ethernet (SPM-Main)	Support
Wi-Fi	IEEE 802.11 b/g/n 2.4GHz
Material	PC V0
Box Size	146x92x70mm
Weight	254g

SPM-4Relay

Smart Stackable Power Meter



Remote Control



Power Monitoring



Overload protection

Voltage	100-240V AC 50/60Hz
Output	100-240V AC 50/60Hz
Max. Load	20A/Gang
MCU :	ESP32+GD32F
Gang	4-Gang
Material	PC V0
Box Size	254x92x70mm
Weight	642g





Pametni merilci temperature in vlage

DIY SMART SWITCHES



TH Origin/Elite

Smart Temperature and Humidity Monitoring Switch



Voice Control



Single/Countdown Timing



Temperature/Humidity Monitoring

Compatible Sensors: THS01, Si7021, AM2301, DS18B20, MS01

Input: THR316, THR316D: 100-240V AC 50/60Hz 16A Max

THR320, THR320D: 100-240V AC 50/60Hz 20A Max

Output: THR316, THR316D: 100-240V AC 50/60Hz 16A Max

THR320, THR320D: 100-240V AC 50/60Hz 20A Max

Wi-Fi: IEEE 802.11 b/g/n 2.4GHz

Material: PC V0

Box Size: THR316, THR320: 105x64x35mm

THR316D, THR320D: 105x64x39mm

Weight: THR316, THR320: 130g

THR316D, THR320D: 150g

* You can connect SONOFF RL560 sensor extension cable to the sensor to monitor the humidity level in an ideal position.



THR316/THR320



THR316D/THR320D

SMART HOME SECURITY




ZB Bridge/ ZB Bridge-P

Input	5V  1A
Wireless	ZigBee: IEEE 802.15.4 2.4GHz Wi-Fi: IEEE 802.11 b/g/n 2.4GHz
Material	PC V0
Weight	ZB Bridge:35g ZB Bridge-P:39.5g
Box Size	ZB Bridge:64x64x23mm ZB Bridge-P:64x64x37mm



THS01

Temp. & Hum. Sensor

Compatible Products :	TH Origin/TH Elite
Temp. Measuring :	-40°C-85°C
Length :	50cm
Material :	ABS V0
Weight :	22g
Box Size :	90x41x27mm



DS18B20

Waterproof Temperature Sensor

Compatible Products:	TH Origin/TH Elite
Temp. Measuring :	-55°C-125°C
Length :	50cm
Material :	PVC
Weight :	29g
Box Size :	90x41x27mm



SNZB-02

Temperature and Humidity Sensor

Battery	3V (CR2450)
Wireless	ZigBee: IEEE 802.15.4 2.4GHz
Material	PC V0
Weight	15.5g
Box Size	45X19X49mm



Pametni protivlomni senzorji

SMART HOME SECURITY



SNZB-04

Wireless Magnetic
Door/Window Sensor

Battery	3V (CR2032)
Wireless	ZigBee: IEEE 802.15.4 2.4GHz
Material	PC V0
Weight	5.3g (Magnetic attraction) 18g (Sensor)
Box Size	45X19X49mm



DW2 Wi-Fi

Wi-Fi Wireless Door/Window Sensor



Sync Status




Smart Scene

Battery	AAA 1.5V
Working Voltage	DC 3V (2 x 1.5V Battery)
Installation gap	<5mm
Wi-Fi	IEEE 802.11 b/g/n 2.4GHz
Material	PC V0
Dimension	70X31X19 mm (Transmitter) 42X14X16 mm (Magnet)
Weight	37g

Pametni nadzor gibanja in kamere


SMART HOME SECURITY

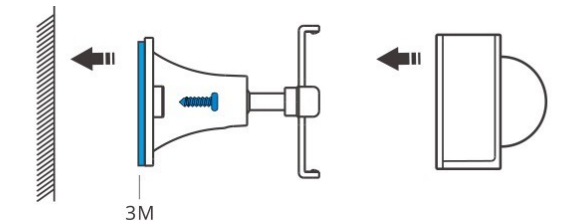

PIR3-RF

Motion Sensor

Distance	≤8m
Angle	100°
Battery	3V (CR2450)
Wireless	IEEE 802.11 b/g/n 2.4GHz & 433MHz
Material	PC V0
Box Size	38x33x42mm
Weight	21g

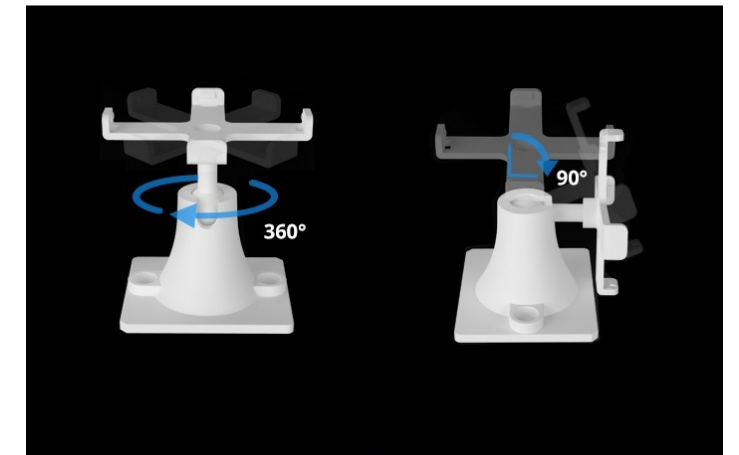

SNZB-03 

Motion Sensor

Battery	3V (CR2450)
Wireless	ZigBee: IEEE 802.15.4 2.4GHz
Material	PC V0
Weight	19g
Box Size	35X39X28mm

SMART HOME SECURITY



CAM Slim

Smart Home Security Camera



Two-way Audio



IR Night Vision

FHD

1080P HD Images



Motion detection



Support cloud storage

Input	5V $\overline{\text{---}}$ 1A
Resolution	1080P
Lens Aperture	F2.3
Wi-Fi	IEEE 802.11 b/g/n 2.4GHz
Material	ABS V0
Storage location :	Cloud storage and TF card (Max.256GB for TF card)
Box Size	140x87x52mm
Weight	195g

SMART HOME SECURITY



GK-200MP2-B

Wi-Fi Wireless IP Security Camera



Two-way Audio



IR Night Vision

HD

1080P HD Images

Input	5V 1.2A
Resolution	1080P
Lens Aperture	F1.2
Wi-Fi	IEEE 802.11 b/g/n 2.4GHz
Material	ABS V0
Storage	TF Card (Max 128GB)
Box Size	116x116x103mm
Weight	32g



TPG-UK




TPB-US



TPI-AU



TPF-DE



SDCS2-64G



SDCS2-32G

Pametni detektorji dima in razlitja vode

DIY SMART SWITCHES



SMW-KIE-SMK-ZB

ZigBee smoke detector



Remote Control

Input	CR123A battery (3V)
Box Size	9,2 × 9,2 × 3,7cm
Weight	141g



SMW-KIE-FLO-ZB

ZigBee smoke detector



Remote Control

Input	CR123A battery (3V)
Box Size	9,2 × 9,2 × 3,7cm
Weight	141g



Dodatki

ACCESSORIES



THS01

Temp. & Hum. Sensor

Compatible Products : TH Origin/TH Elite
 Temp. Measuring : -40°C-85°C
 Length : 50cm
 Material : ABS V0
 Weight : 22g
 Box Size : 90x41x27mm



DS18B20

Waterproof Temperature Sensor

Compatible Products: TH Origin/TH Elite
 Temp. Measuring : -55°C-125°C
 Length : 50cm
 Material : PVC
 Weight : 29g
 Box Size : 90x41x27mm



MS01

Soil Moisture Sensor

Compatible Products : TH Origin/TH Elite
 Working Temperature : 0°C-60°C
 Length : 50cm
 Material : PC V0
 Weight : 28g
 Box Size : 145x31.5x16mm



RL560

Sensor Extension Cable

Compatible Products : TH Origin/TH Elite
 Interface/Connector types : RJ9 4P4C
 Length : 50cm
 Material : PC V0
 Weight : 74g
 Box Size : 95x100x21mm



NFC-Tag

NFC Card Size : 85.5x54mm
 Tag Size Tag: 18x18mm
 Box Size: 120x77mm



StandB/W

Enclosure Stand

Color : Dim Gray : White
 Material : PC V0
 Weight : 110g
 Box Size : 123x90x69mm

ACCESSORIES



433 RF Controller

4-key 433MHz Remote Controller

Battery	12V (27A)
Wireless	433MHz
Material	ABS V0
Weight	31g
Box Size	50x30x12mm



DR

DIN Rail Tray


Compatible Products	BASICR2/RF/BASICR3/RFR3/DUALR2 POWR2/TH10/TH16
Material	ABS V0
Weight	22g
Box Size	122x54x14mm



RM433R2

8-key 433MHz Remote Controller

Compatible Products	RF/RFR3/4CHPROR3/iFan03/SlampherR2 TX Series*(T2/T3)/RF Bridge D1*(On the way...)
Battery	3V button cell (CR2450)
Wireless	433MHz
Material	PC V0
Weight	49g
Box Size	90x46x18mm

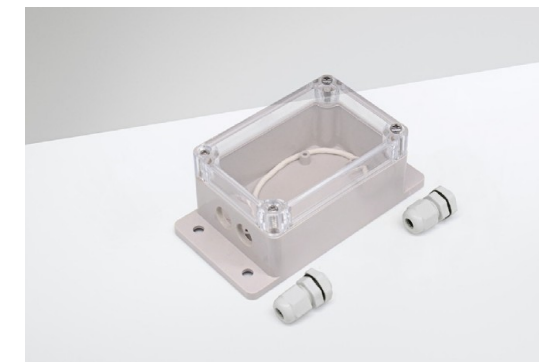

Waterproof Case-IP66

IP66 Waterproof Case


Compatible Products	BASICR2/RF/BASICR3/RFR3/DUALR2 POWR2/TH10/TH16
Material	ABS V0
Weight	112g
Box Size	135x72x52mm



RM433R2-BASE

433MHz Remote Controller Base

Compatible Product	RM433
Temp.Measuring	3M Tapes/Screws
Material	PC V0
Weight	53g
Box Size	92x90x18mm

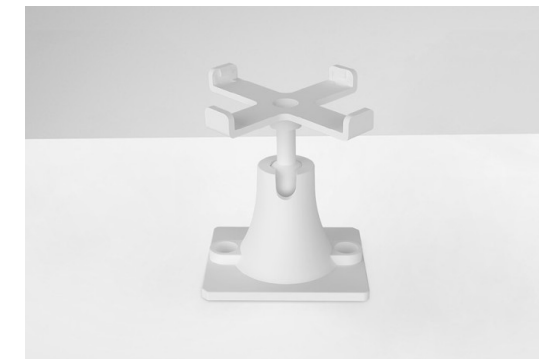

Motion Sensor-BASE

Motion Sensor-BASE

Compatible Product	PIR3-RF
Material	PC V0
Weight	14g
Box Size	44x38x42mm



Aplikacija e-WeLink in programiranje




Remote Control



Share Control



Timer Schedule



Power on State




History Operation Record



Sync Status



LAN Control



Voice Control

EN

Multi-language Operation



Smart Scene



Inching Mode



Camera Feature





Interlocking



Group Control

SONOFF

Smart Device Work with
eWeLink APP

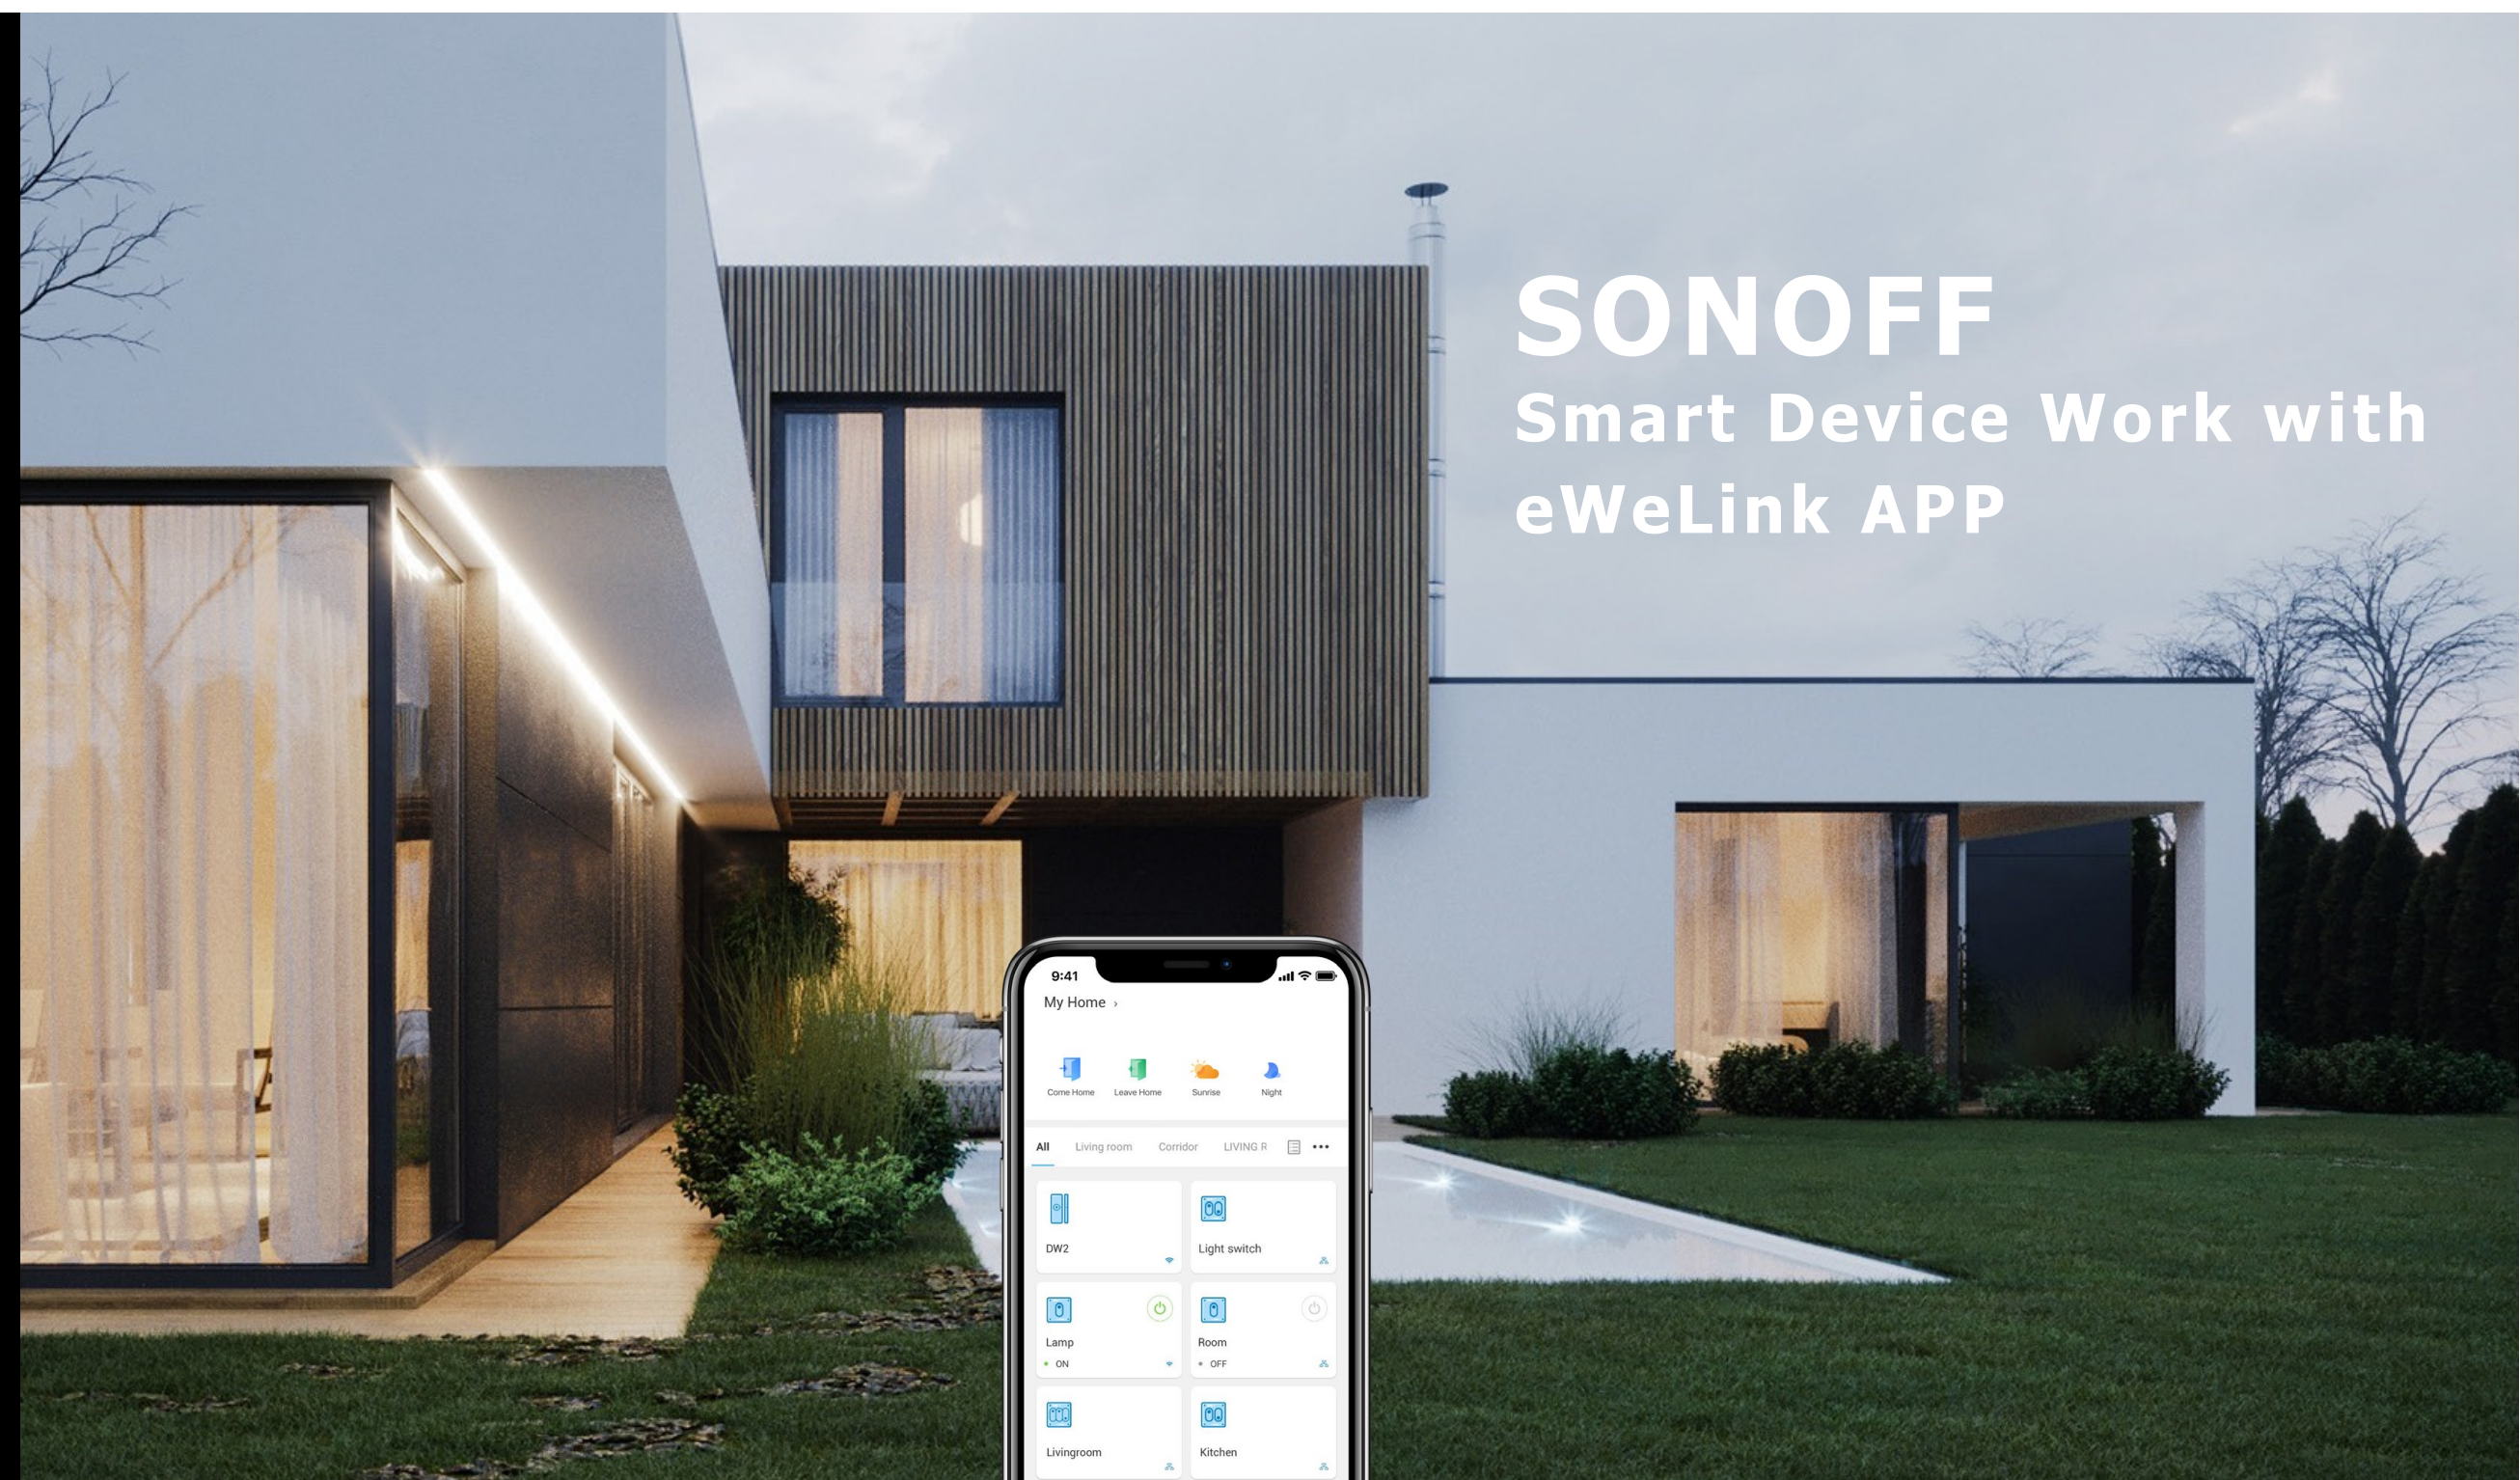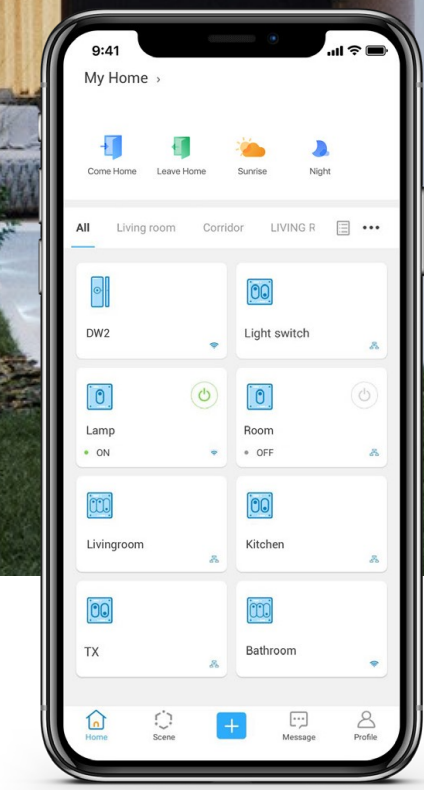

Hvala!

Dodatna vprašanja?

info@iotronx.com
+38630375454
Stikalko.si

